

ICUSB1284INT

24in Motherboard USB Header to Parallel Adapter

StarTech.com
Making hard-to-find easy!®

Installation Guide

Packaging Contents

- 1 x ICUSB1284INT adapter
- 1 x Low Profile Bracket
- 1 x Driver CD
- 1 x Installation Guide

System Requirements

- Computer system with available 9-pin internal USB header
- Computer chassis with available desktop expansion card slot
- Microsoft® Windows® 2000/XP/Server 2003/Vista/Server 2008 R2/7 (32/64-bit), or Apple® Mac OS® X (10.6.x)

Installation

WARNING! Computer parts can be severely damaged by static electricity. Be sure that you are properly grounded before opening your computer case. StarTech.com recommends that you wear an anti-static strap when installing any computer component. If an anti-static strap is unavailable, discharge yourself of any static electricity build-up by touching a large grounded metal surface (such as the computer case) for several seconds.


1. Turn your computer off and any peripherals connected to the computer (i.e. Printers, external hard drives, etc.). Unplug the power cable from the rear of the power supply on the back of the computer and disconnect all peripheral devices.
2. Remove the cover from the computer case. Refer to documentation for your computer system for details.
3. Locate an open expansion card slot on the rear of the computer case and remove the metal cover plate.
4. Place the adapter's expansion card bracket into the opening and fasten the bracket to the rear of the case.
NOTE: If installing into a small form factor chassis, change the card's bracket for the included Low Profile bracket.
5. Locate a 9-pin USB header connector on the motherboard and plug in the IDC connector on the cable. The IDC connector is keyed to help prevent incorrect installation. See system or motherboard documentation for details.
6. Place the cover back onto the computer case.
7. Insert the power cable into the socket on the power supply and reconnect all other connectors removed in Step 1.

Verifying Installation

Windows 2000/XP/Server 2003/Vista/Server 2008 R2/7


No driver installation is required for the supported operating systems, as they will automatically install a USB Printing port. From the main desktop, right-click on "My Computer" ("Computer" in Vista/7), then select Manage. In the new Computer Management window, select Device Manager from the left window panel.

Under the "Universal Serial Bus Controllers" category should be a device called "USB Printing Support".

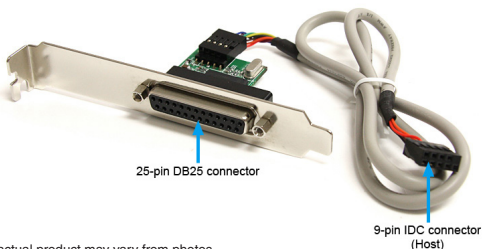

*actual product may vary from photos

9-pin IDC connector



Specifications

Bus Interface	USB 1.1
Form Factor	Full/Low Profile
Chipset ID	Prolific PL-2305
Connectors	1 x DB25 female 1 x 9-pin IDC female
Supported Standard	IEEE 1284-1994
Operating Temperature	0°C ~ 115°C (32°F ~ 239°F)
Storage Temperature	-55°C ~ 150°C (-67°F ~ 302°F)
Integrated Cable Length	24in
Weight	55g
Compatible Operating Systems	Windows 2000/XP/Server 2003/ Vista/Server 2008 R2/7 (32/64-bit), Mac OS X (10.6.x)

Warranty Information

This product is backed by a one year warranty.

In addition, StarTech.com warrants its products against defects in materials

and workmanship for the periods noted, following the initial date of purchase. During this period, the products may be returned for repair, or replacement with equivalent products at our discretion. The warranty covers parts and labor costs only. StarTech.com does not warrant its products from defects or damages arising from misuse, abuse, alteration, or normal wear and tear.

Limitation of Liability

In no event shall the liability of StarTech.com Ltd. and StarTech.com USA LLP (or their officers, directors, employees or agents) for any damages (whether direct or indirect, special, punitive, incidental, consequential, or otherwise), loss of profits, loss of business, or any pecuniary loss, arising out of or related to the use of the product exceed the actual price paid for the product. Some states do not allow the exclusion or limitation of incidental or consequential damages. If such laws apply, the limitations or exclusions contained in this statement may not apply to you.

Manual Revision:09/01/2010
For the most up-to-date information, please visit www.startech.com